

D-20

1 CH DMX Dimmer Pack

【User Manual】



Lite Puter Enterprise Co., Ltd

Website: www.liteputer.com.tw

Email: sales@liteputer.com.tw

Index

1. Introduction	3
1-1 Feature	3
1-2 Specification	3
1-3 Dimension	3
1-4 Function.....	4
1-5 System Diagram	4
2. Operation	5
2-1 Connection	5
Guarantee	5

1. Introduction

1-1 Feature

- 1 channel outputs 20A (Max.).
- C3 dimming curve.
- D-20 can work with other dimmer packs at different power level.


1-2 Specification

- Power Supply : AC 100V~240V , 45-63 HZ
- Output : 20A (Max.)
- Dimension : 166.4 (W) x 185 (H) x 58(D) mm
- Weight : 1.46Kg

1-3 Dimension



1-4 Function

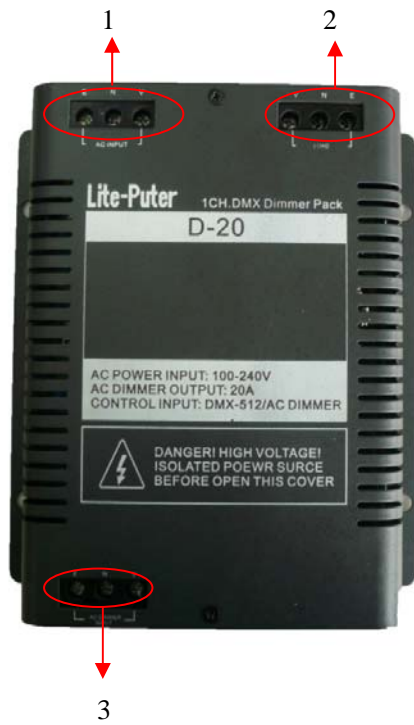

1	AC input
2	Load
3	AC dimmer input

1-5 System Diagram



2. Operation

2-1 Connection

D-20 is a dimmable output amplifier, user can connect D-20's AC dimmer input port to one of another device's output channel that needs to be amplified and then connect the loads to D-20's load port.

Guarantee

Lite-Puter promises to fulfill the following acceptances:

1. Lite-Puter is only responsible for D-20 itself.
2. Lite-Puter guarantees to keep Lite-Puter's fault products caused by techniques, materials and any other logical reasons in good repair for free within a year since the distributing date.
3. We do not offer door-visiting service. If the trouble appears in Lite-Puter's products, please deliver the equipment to local distributors or Taipei headquarter.

*** Special Statement***

Any fault caused by false usage, imprudence (collision or inadequate installation) or force majeure factors are not in Lite-Puter's service.

Revision Record

Version	Record
A	First version

Issued on: December, 2010

Lite-Puter

World Headquarter:

Lite Puter Enterprise Co., Ltd.

Address: 11F, No. 189, Gangqian Rd., Neihu Dist., Taipei City, Taiwan

Zip Code: 11494

Tel: +886-2-27998099

Fax: +886-2-27993828

Website: www.liteputer.com.tw

E-mail: sales@liteputer.com.tw

Shanghai Factory:

Lite Puter Technology (Shanghai) Co., Ltd.

Address: Building B5, No. 298, Lane 3509, Hongmei S. Road, Shanghai, China

Zip Code: 201108

Tel: +86-21-54408210

Fax: +86-21-64978079

Shanghai Sales Center:

Address: Room 701, Building Gem, No. 487, Tianlin Road, Shanghai, China

Zip Code: 201103

Tel: +86-21-33674316/33674850

Fax: +86-21-33674013

Website: www.liteputer.com.cn

E-mail: sales_china@liteputer.com.tw